

*flamic*

## BAKERY

FLAMIC proposed itself as a young and dynamic company which is specialized in the production of dough sheeters for bakeries and pastries with conveyor belts width ranges of 450 mm manual (mod. SF450), 500 mm manual (mod. SF500 and mod. SF500B), 600 mm manual (mod. SF600 and SF600V) and 700 mm automatic (FAST700 and FAST700P).

**MADE IN ITALY**



# MANUFACTURER OF EQUIPMENTS FOR CATERING



FLAMIC COMPANY HAS BEEN FOUNDED IN 2004 IN THE INDUSTRIAL TRIANGLE AREA FORMED BY THIENE, MARANO AND SCHIO, OTHERWISE KNOWN AS THE "ALTOVICENTINO", AN AREA KNOWN FOR BEING THE CRADLE OF MANY SPECIALIZED IN PRODUCTION OF MACHINERY AND OVENS FOR THE "WHITE ART" (BAKERY AND PASTRY EQUIPMENT). GIVEN THE HIGH CONCENTRATION OF THESE FIRMS ON THE TERRITORY IT CAN BE SAID THAT ALTOVICENTINO IS AN INDUSTRIAL DISTRICT FOR BAKERY PRODUCTS MACHINES. THE COMPANY FLAMIC IS LOCATED AND DEVELOPED IN A VERY FAVORABLE GEOGRAPHICAL CONTEXT FEATURING AN "INDUSTRIAL ATMOSPHERE" RICH OF PROFESSIONALISM, TECHNICAL SKILL AND TECHNOLOGY. IN THIS BACKGROUND WHERE AN EFFICIENT NETWORK OF SUB-SUPPLIERS WORKS IN SUPPORT OF THE FIRMS IT IS POSSIBLE TO HAVE NEW IDEAS AND CARRY OUT ADVANCED TECHNOLOGICAL RESEARCH.

IN THE FOLLOWING PAGES

BAKERY OVENS →  
THE BAKERY & PASTRY VENS →

[WWW.FLAMIC.IT](http://WWW.FLAMIC.IT)  
[JESSYTRADE.COM](http://JESSYTRADE.COM)

BROUGHT TO YOU BY  
JESSY TRADE

# flamic



➤ SF500 | SF500V



➤ SF600V



➤ SF600



➤ SF500B | SF500BV



➤ SF450B | SF450BV




- Painted steel structure (on request stainless steel is also possible)
- Safety covers device in accordance with CE regulations
- Precise regulation on thickness of sheet by a graded scale
- Scrapers can be removed very easy
- Variable speed between infeed and discharge belts assure regular dough sheet
- Belts can be raised when the machine is not in use to obtain more free space
- Reversal rolling belts by joystick and/or by pedal
- *Optional:* cutting unit for croissants, pizza etc. and variable speed belts

## CARATTERISTICHE TECNICHE/TECHNICAL FEATURES/CARACTERISTIQUES TECHNIQUES/CARACTERISTICAS TECNICAS


CODICE MACCHINA/MACHINE CODE/COE MACHINE/ CODIGO MAQUINA	SF450B	SF450BV	SF500B	SF500BV	SF500	SF500V	SF600	SF600V
TIPO/TYPE/TIPO	BENCH	BENCH	BENCH	BENCH	A-FRAME	A-FRAME	A-FRAME	A-FRAME
DIAMETRO CILINDRI/CYLINDERS DIAMETER/CYLINDRES DIAMÈTRE/ DIÁMETRO CILINDROS	60 mm	60 mm	60 mm	60 mm	60 mm	60 mm	70 mm	70 mm
LARGHEZZA TAPPETI/BELT WIDTH/LARGER TAPIS/ ANCHURA TAPETES	450 mm4	50 mm5	00 mm5	00 mm5	00 mm5	00 mm	600 mm	600 mm
LUNGHEZZA PIANI/LENGHT BELTS/LONGUEUR TAPIS/ LARGO TAPETES	500/700 mm5	00/700 mm8	50/1000 mm8	50/1000mm	850/1000/ 1200 mm	850/1000/ 1200 mm	850/1000/1200/ 1400/1600 mm	850/1000/1200/ 1400/1600 mm
VELOCITÀ TAPPETO IN USCITA/EXIT BELT-VITESSE SPEED TAPIS-VELOCIDAD DE SORTIE/TAPETES EN SALIDA	30 m/min	MIN 3 m/min MAX 33 m/min	30 m/min	MIN 3 m/min MAX 33 m/min	30 m/min	MIN 3 m/min MAX 33 m/min	MIN 4 m/min MAX 36 m/min	MIN 4 m/min MAX 36 m/min
APERTURA CILINDRI/ROLLER GAP/OUVERTURE CYLINDRES/ APERTURA CILINDROS	0-35 mm	0-35 mm	0-35 mm	0-35 mm	0-35 mm	0-35 mm	0-40 mm	0-40 mm
POTENZA MOTORE/MOTOR POWER/PUISSANCE MOTOR/ POTENCIA MOTOR	0,50 kW	0,50 kW	0,50 kW	0,50 kW	0,50 kW	0,50 kW	0,75 kW	0,75 kW
PESO/WEIGHT/POIDS/PESO	90 Kg	90 Kg	140 Kg	140 Kg	170 Kg	170 Kg	245 Kg	245 Kg

SFOGLIATRICI • SHEETERS • LAMINOIRS • LAMINADORAS


> SF450B | SF450BV

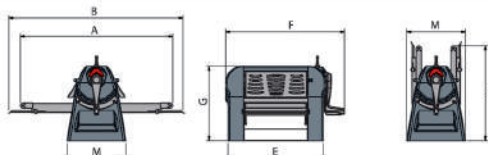


> SF500B | SF500BV

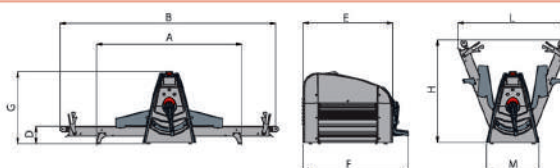

> SF500 | SF500V

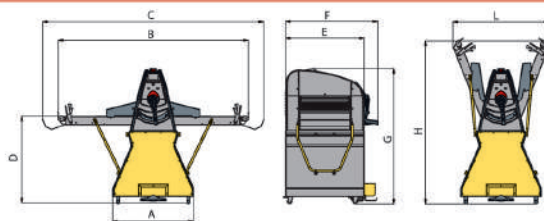

> SF600 | SF600V

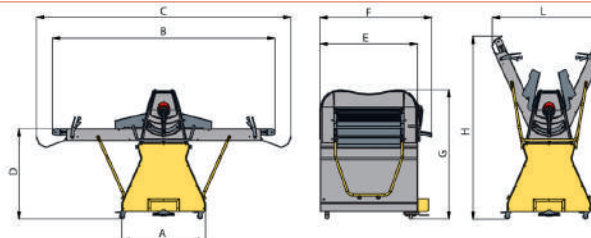

DIMENSIONI/DIMENSIONS/DIMENSIONS/DIMENSIONES

	AB		CD		EF		GH		LM	
SF450B-500	1120	1280	--	--	700	870	540	690	-	430
SF450B-700	1520	1680	--	--	700	870	540	890	-	430
SF500B-850	1250	1860	2110	150	770	910	620	880	950	455
SF500B-1000	1250	2160	2410	150	770	910	620	1030	1000	455
SF500-850	800	1860	2110	880	770	910	1335	1620	950	-
SF500-1000	800	2160	2410	880	770	910	1335	1760	1020	-
SF500-1200	800	2560	2810	880	770	910	1335	1920	1180	-
SF600-850	800	1860	2190	900	920	1065	1225	1619	960	-
SF600-1000	800	2160	2490	900	920	1065	1225	1757	1100	-
SF600-1200	800	2560	2890	900	920	1065	1225	1940	1250	-
SF600-1400	800	2960	3290	900	920	1065	1225	2123	1400	-
SF600-1600	800	3480	3810	900	920	1065	1225	--	--	-